

A

B

C

D

E

F

A







B

C


D

E

F

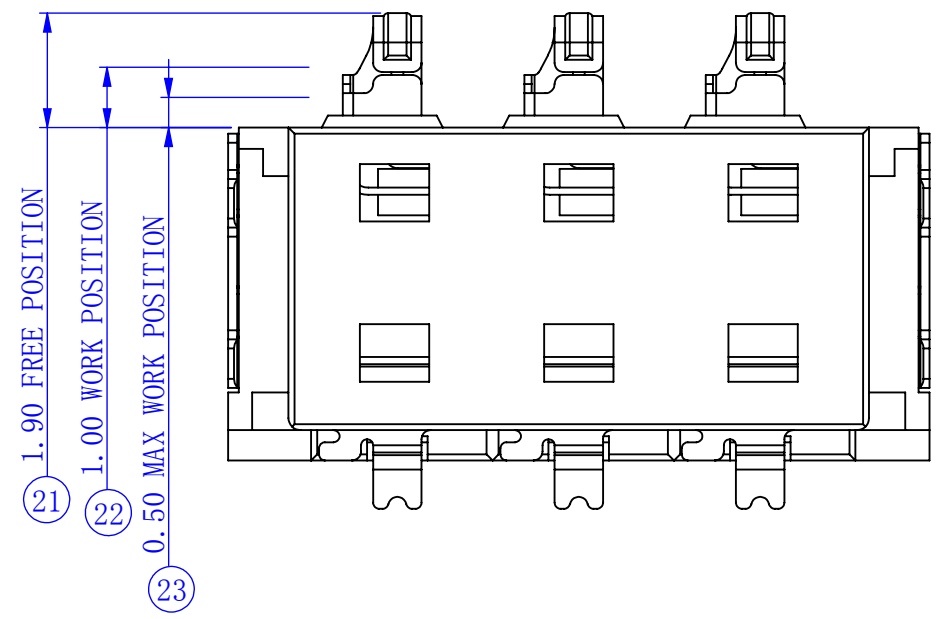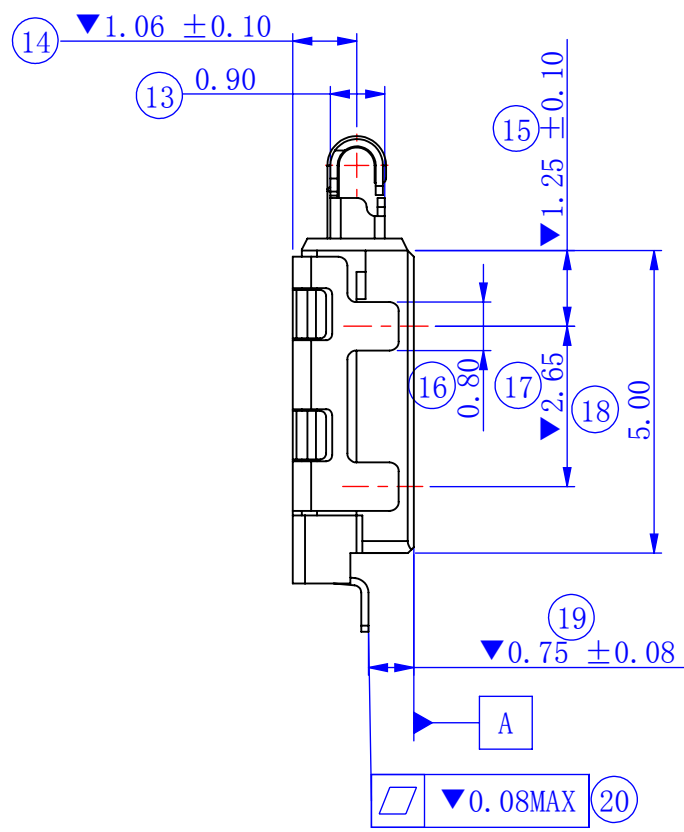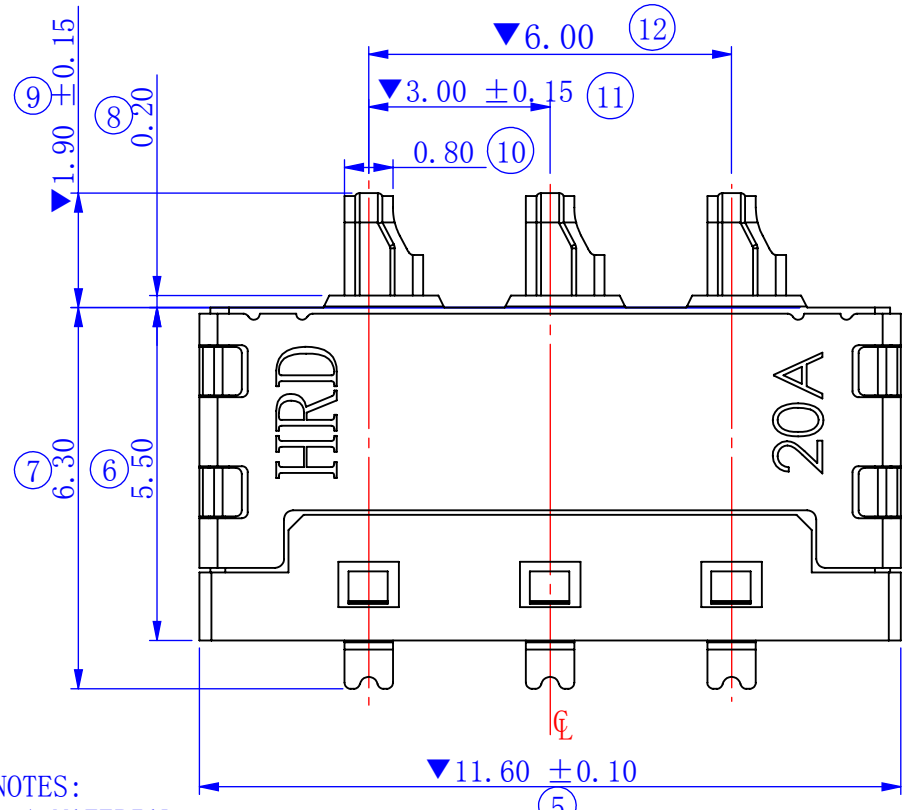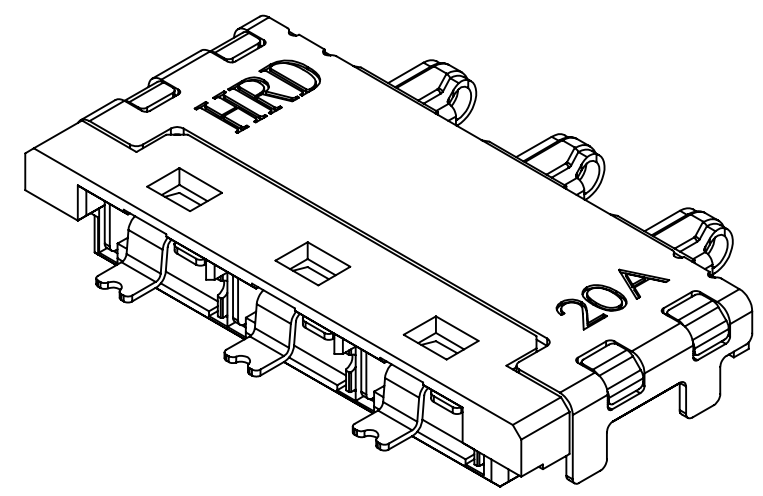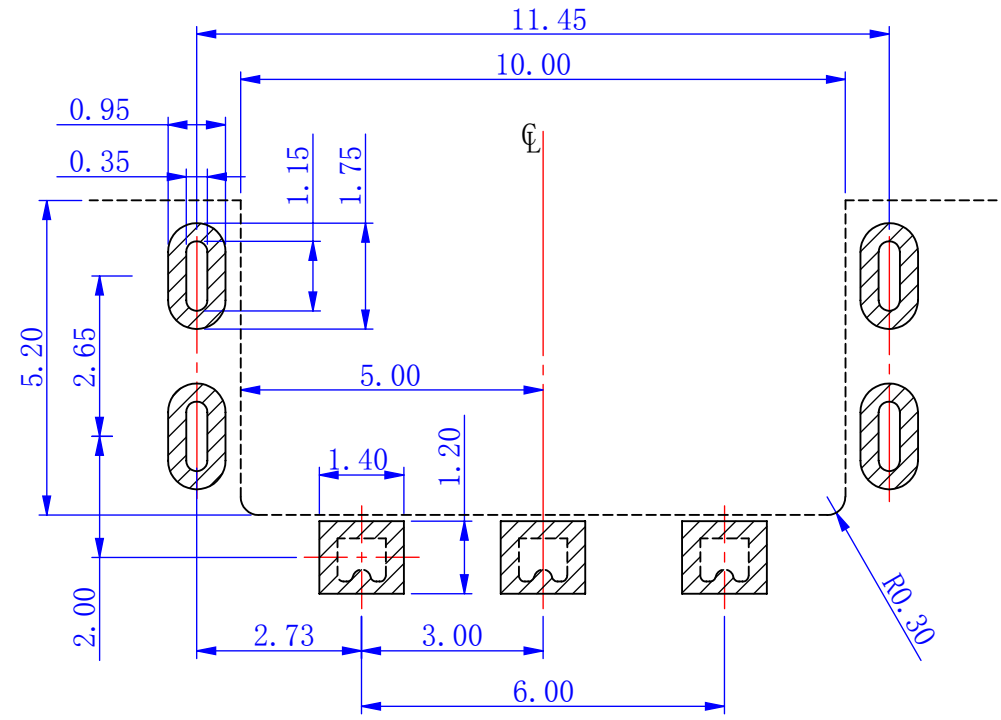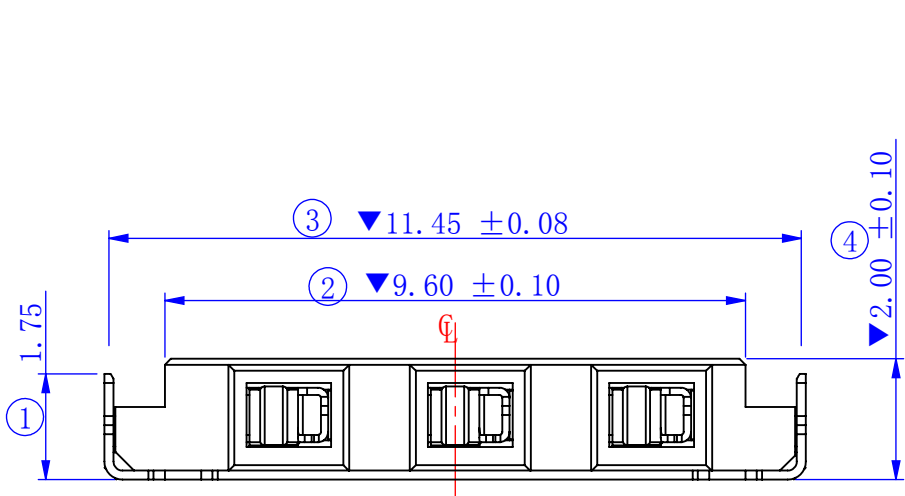

NOTES:
 1. MATERIAL:
 BODY:HI-TEMP. PLASTIC, BLACK, UL 94V-0
 TERMINAL:COPPER ALLOY, T=0.12mm
 SHELL:STAINLESS STEEL T=0.15mm
 2. FINISH:
 TERMINA:50u" MIN Ni UNDERPLATING OVERALL
 GOLD FLASH ON CONTACT AREA
 TIN 60-200u" PLATED ON SOLDER TAIL AREA
 SHELL:50u" MIN Ni UNDERPLATING OVERALL
 GOLD FLASH ON SOLDER TAIL AREA
 3. ALL DIMENSIONS MARKED ▼ MUST BE CONTROLLED BY QC
 4. ALL DIMENSIONS MARKER (XX) MUST BE MEASURED BY FAI.
 5. GP PASSED ACCORD WITH HRD-RoHS-219 STANDARD

				UNITS: mm	GENERAL TOLERANCE		DRAW:	PART NO: B63-AB03F20A
D	E1910589A	更新图面	10/06/2019	DATE: 05/12/2016	X. ±0.20	X° ±2.00°	CHECKED:	TITLE: 总高度2.00H 板上 1.20H 测压式电池座
C	E1908500A	调整尺寸管控	08/30/2019	SCALE: 8:1	.X ±0.15	.X° ±1.00°	APPROVE:	DRAWING NO:
B	E1606244A	更新图面	06/28/2016	SHEET: 1/1	.XX ±0.10	.XX° ±0.50°	 昆山捷皇电子精密科技有限公司 HONGRIDA ELECTRONIC TECHNOLOGY CO.,LTD.	
REV.	ECN NO.	DESCRIPTION	DATE	REV. A	.XXX ±0.05	.XXX° ±0.10°		